查询PGC36DAAN-M供应商

.100" [2.54mm] X .100", .025" SQUARE POST HEADER

JUMPER

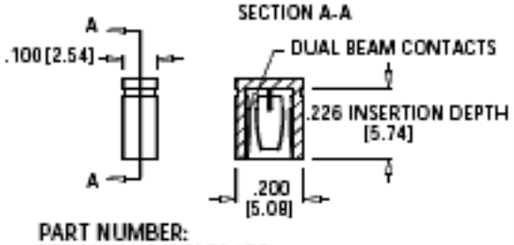

PART NUMBER:
STC02SYAN (TIN PLATE)
SPC02SYAN (GOLD FLASH)
SSC02SYAN (GOLD PLATE)

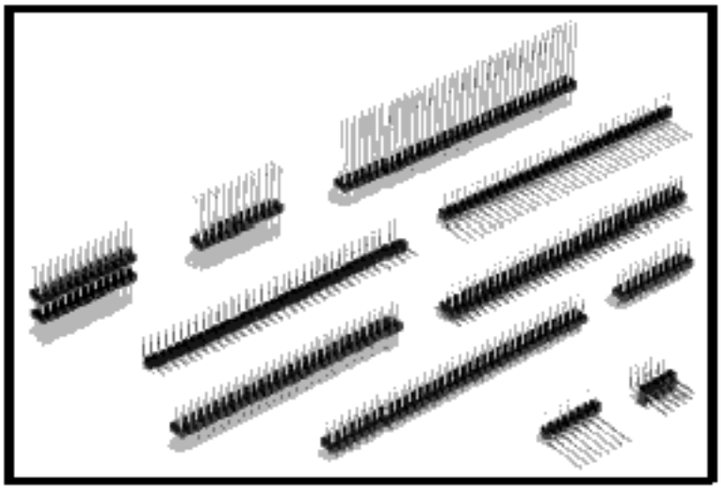

READOUT

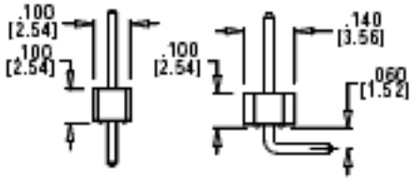

SINGLE (S)

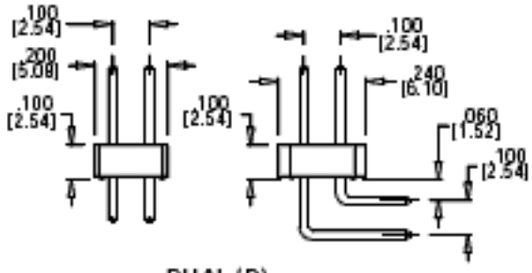

DUAL (D)

FEATURES

- 3 amp current rating
- UL Flammability Rating: 94V-0
- Insulator: Black Thermoplastic Polyester
- Contact Material: Copper Alloy
- Consult Factory for availability of .100" x .100" Receptacles

For more detailed information please request our seperate Headers Catalog.

TERMINATION TYPE

P/N CODE	HEAD DIMENSIONS	TAIL DIMENSIONS
AA	.230 [5.84]	.120 [3.05]
AB	.230 [5.84]	.230 [5.84]
AC	.230 [5.84]	.320 [8.13]
AD	.230 [5.84]	.420 [10.67]
AE	.230 [5.84]	.520 [13.21]
AF	.230 [5.84]	.620 [15.75]
AG	.230 [5.84]	.720 [18.29]
AH	.230 [5.84]	.820 [20.83]
FA	.318 [8.08]	.120 [3.05]
FB	.318 [8.08]	.220 [5.59]
FC	.318 [8.08]	.320 [8.13]
FD	.318 [8.08]	.420 [10.67]
FE	.318 [8.08]	.520 [13.21]
ZA	.120 [3.05]	.120 [3.05]
ZC	.120 [3.05]	.260 [6.60]
ZD	.120 [3.05]	.610 [15.49]

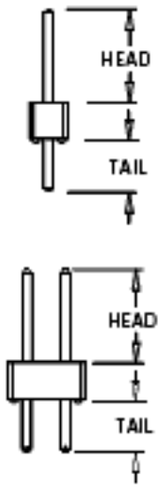

RIGHT ANGLE BEND

P/N CODE	HEAD DIMENSIONS	TAIL DIMENSIONS
BA	.230 [5.84]	.100 [3.05]
BB	.230 [5.84]	.200 [5.84]
BC	.230 [5.84]	.300 [8.13]
BD	.230 [5.84]	.400 [10.67]
BE	.230 [5.84]	.500 [13.21]
BF**	.230 [5.84]	.600 [15.75]
BG**	.230 [5.84]	.700 [18.29]
GA	.318 [8.08]	.100 [3.05]
GB	.318 [8.08]	.200 [5.59]
GC**	.318 [8.08]	.300 [8.13]
GD**	.318 [8.08]	.400 [10.67]

** Consult factory for availability in dual readout.

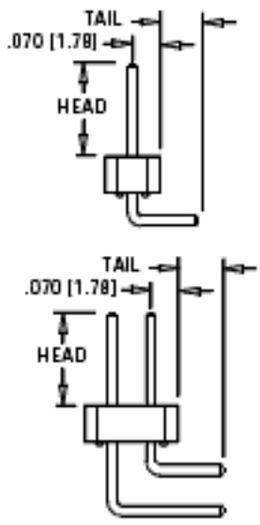

.100" [2.54mm] X .100", .025" SQUARE POST HEADER

PART NUMBER CODING

P Z C 36 D AA N -M#

SERIES
P = .025" [.64 mm] Sq. Post Header

CONTACT FINISH

Head	Tail	Underplate
Z = .000010" Gold	.000100" Tin	.000050" Nickel
X = .000030" Gold	.000100" Tin	.000050" Nickel
G = .000010" Gold	.000005" Gold	.000050" Nickel**
Y = .000030" Gold	.000005" Gold	.000050" Nickel**
T = .000100" Tin	.000100" Tin	.000050" Nickel

CONTACT CENTERS
C = .100" [2.54mm]

NUMBER OF POSITIONS
01 Thru 36
(eg. 32 Dual = 64 Contacts)

MODIFICATIONS
(Consult Factory)
Omit for Standard

MOUNTING STYLE
N = No Mounting
R = Retent Lead
(Consult Factory)

TERMINATION TYPE (Opposite Page)
AA, AB, AC, AD, AE, AF, AG, AH
FA, FB, FC, FD, FE,
BA, BB, BC, BD, BE, BF,
GA, GB, GC, GD, ZA, ZC, ZD

READOUT (Opposite Page)
S = Single
D = Dual

DIMENSIONS

Dimensions in [ ] are in millimeters, all others in inches.

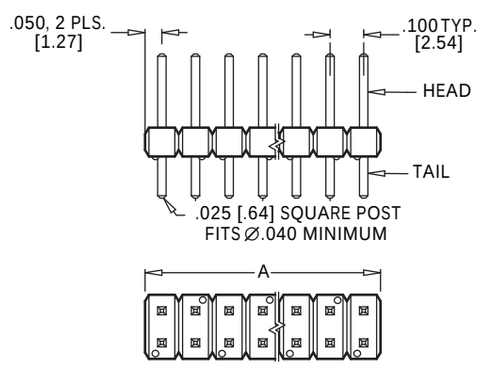

DUAL READOUT,
STRAIGHT TAIL SHOWN

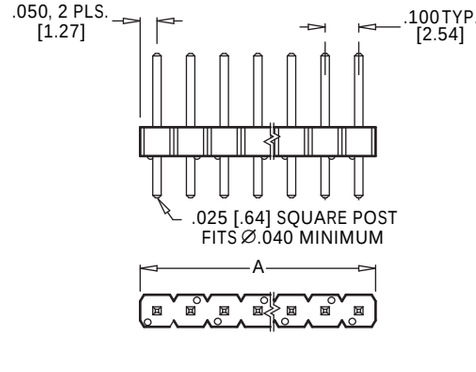

SINGLE READOUT,
STRAIGHT TAIL SHOWN

PART NUMBER*	NUMBER OF CONTACTS SINGLE/DUAL	OVERALL LENGTH A	
PZC01 _ _ N	1/2	0.100	[2.54]
PZC02 _ _ N	2/4	0.200	[5.08]
PZC03 _ _ N	3/6	0.300	[7.62]
PZC04 _ _ N	4/8	0.400	[10.16]
PZC05 _ _ N	5/10	0.500	[12.70]
PZC06 _ _ N	6/12	0.600	[15.24]
PZC07 _ _ N	7/14	0.700	[17.78]
PZC08 _ _ N	8/16	0.800	[20.32]
PZC09 _ _ N	9/18	0.900	[22.86]
PZC10 _ _ N	10/20	1.000	[25.40]
PZC11 _ _ N	11/22	1.100	[27.94]
PZC12 _ _ N	12/24	1.200	[30.48]
PZC13 _ _ N	13/26	1.300	[33.02]
PZC14 _ _ N	14/28	1.400	[35.56]
PZC15 _ _ N	15/30	1.500	[38.10]
PZC16 _ _ N	16/32	1.600	[40.64]
PZC17 _ _ N	17/34	1.700	[43.18]
PZC18 _ _ N	18/36	1.800	[45.72]

PART NUMBER*	NUMBER OF CONTACTS SINGLE/DUAL	OVERALL LENGTH A	
PZC19 _ _ N	19/38	1.900	[48.26]
PZC20 _ _ N	20/40	2.000	[50.80]
PZC21 _ _ N	21/42	2.100	[53.34]
PZC22 _ _ N	22/44	2.200	[55.88]
PZC23 _ _ N	23/46	2.300	[58.42]
PZC24 _ _ N	24/48	2.400	[60.96]
PZC25 _ _ N	25/50	2.500	[63.50]
PZC26 _ _ N	26/52	2.600	[66.04]
PZC27 _ _ N	27/54	2.700	[68.58]
PZC28 _ _ N	28/56	2.800	[71.12]
PZC29 _ _ N	29/58	2.900	[73.66]
PZC30 _ _ N	30/60	3.000	[76.20]
PZC31 _ _ N	31/62	3.100	[78.74]
PZC32 _ _ N	32/64	3.200	[81.28]
PZC33 _ _ N	33/66	3.300	[83.82]
PZC34 _ _ N	34/68	3.400	[86.36]
PZC35 _ _ N	35/70	3.500	[88.90]
PZC36 _ _ N	36/72	3.600	[91.44]

* For complete part number add readout and termination type from Part Number Coding (e.g. PZC36DAAN).
** Consult Factory